


ILLUMINATOR
MODEL : L150, L250


WISE®

DESCRIPTION

Complete Range of Size : Single and Double Section WISE Explosion-proof Illuminator are made in Single and Double Section styles for Transparent and Reflex Gauges. Double Section illuminator require only one bulb for complete illumination of two gauge sections.

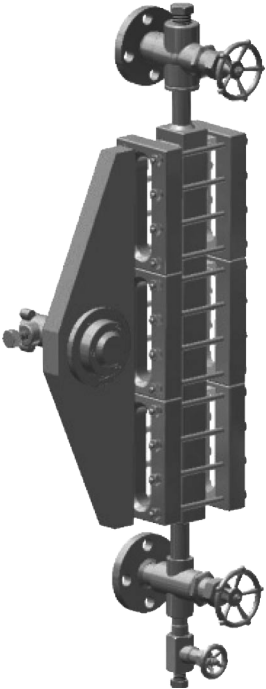

Illuminator Explosion - Proof
JIS d2g4

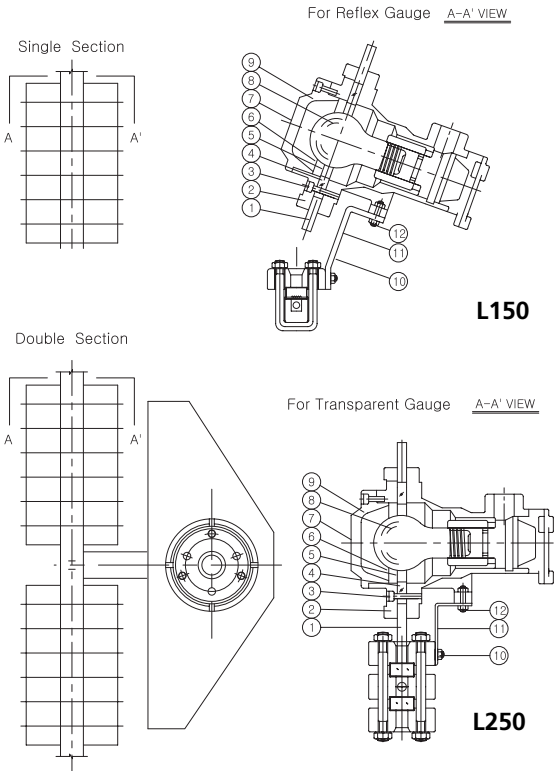

SPECIFICATION

ELECTRICITY -

Voltage : 110~240V, 60Hz
Bulb light : 30W, 60W, 100W
Explosion-proof : d2G4

NO.	DESCRIPTION	MATERIAL	Q'TY
1	REFLECTOR	METHACRYLATE	1
2	COVER	AC4C	1
3	BOLT	SUS 304	1
4	GLASS PLATE	GLASS	3
5	O-RING	NBR	1
6	GASKET	T#1000	1
7	COVER	AC4C	1
8	BULB LIGHT		1
9	LIGHT HOUSING	AC4C	
10	BOLT	SS41	2
11	HOLDER	SS412	1
12	BOLT NUT	SS412	2

LEVEL GAUGE ORDERING INFORMATION

(Reflex)

GAUGE PATTERN

L100 : Reflex
L110 : Reflex Large Chamber
L120 : Reflex Non-Frosting
L130 : Reflex Jacketed
L140 : Reflex Zig-Zag
L150 : Reflex Illuminator
L160 : Reflex Bi-Color

VESSEL CON'N SIZE

ANSI	JIS	ANSI	JIS
AA : 1/2" 150# RF	JA : 15A 10K RF	AJ : 1 1/2" 150# RF	JJ : 40A 10K RF
AB : 1/2" 300# RF	JB : 15A 20K RF	AK : 1 1/2" 300# RF	JK : 40A 20K RF
AC : 1/2" 600# RF	JC : 15A 30K RF	AL : 1 1/2" 600# RF	JL : 40A 30K RF
AD : 3/4" 150# RF	JD : 20A 10K RF	AM : 2" 150# RF	JM : 50A 10K RF
AE : 3/4" 300# RF	JE : 20A 20K RF	AN : 2" 300# RF	JN : 50A 20K RF
AF : 3/4" 600# RF	JF : 20A 30K RF	AO : 2" 600# RF	JO : 50A 30K RF
AG : 1" 150# RF	JG : 25A 10K RF	AP : 1/2" NPT	JP : 1/2" PT
AH : 1" 300# RF	JH : 25A 20K RF	AQ : 3/4" NPT	JQ : 3/4" PT
AI : 1" 600# RF	JI : 25A 30K RF	OH : OTHER	

VESSEL CON'N TYPE

A : Flanged B : Union & Screwed O : Other

HOOK-UP

B : Top & Bottom L : Side-Side (Left)
R : Side-Side (Right) O : Other Hook-Up

GAUGE CON'N

G : Gland U : Union S : Screwed O : Other

GAGE VALVE

S : Straight O : Off-Set N : None

CENTER TO CENTER(mm)

XXXX

CHAMBER MAT'L

CSC : Body-C.S / Cover-C.S
S1C : Body-304SS / Cover-C.S
SS1 : Body-304SS / Cover-304SS
ZZZ : Other

DRAIN END

D : Dust-Proof Cap Inserted
P : With Plug
O : Other

OPTION

S : Scale Plate
O : Other
N : None

L100

AE

A

B

S

O

XXXX

S1C

P

N

LEVEL GAUGE ORDERING INFORMATION

(Transparent)

GAUGE PATTERN

L200 : Transparent
L210 : Transparent Large Chamber
L220 : Transparent Non-Frosting
L230 : Transparent Jacketed
L240 : Transparent Zig-Zag
L250 : Transparent Illuminator
L260 : Transparent Bi-Color

VESSEL CON'N SIZE

ANSI	JIS	ANSI	JIS
AA : 1/2" 150# RF	JA : 15A 10K RF	AJ : 1 1/2" 150# RF	JJ : 40A 10K RF
AB : 1/2" 300# RF	JB : 15A 20K RF	AK : 1 1/2" 300# RF	JK : 40A 20K RF
AC : 1/2" 600# RF	JC : 15A 30K RF	AL : 1 1/2" 600# RF	JL : 40A 30K RF
AD : 3/4" 150# RF	JD : 20A 10K RF	AM : 2" 150# RF	JM : 50A 10K RF
AE : 3/4" 300# RF	JE : 20A 20K RF	AN : 2" 300# RF	JN : 50A 20K RF
AF : 3/4" 600# RF	JF : 20A 30K RF	AO : 2" 600# RF	JO : 50A 30K RF
AG : 1" 150# RF	JG : 25A 10K RF	AP : 1/2" NPT	JP : 1/2" PT
AH : 1" 300# RF	JH : 25A 20K RF	AQ : 3/4" NPT	JQ : 3/4" PT
AI : 1" 600# RF	JI : 25A 30K RF	OH : OTHER	

VESSEL CON'N TYPE

A : Flanged B : Union & Screwed O : Other

HOOK-UP

B : Top & Bottom L : Side-Side (Left)
R : Side-Side (Right) O : Other Hook-Up

GAUGE CON'N

G : Gland U : Union S : Screwed O : Other

GAGE VALVE

S : Straight O : Off-Set N : None

CENTER TO CENTER(mm)

XXXX

CHAMBER MAT'L

CSC : Body-C.S / Cover-C.S
S1C : Body-304SS / Cover-C.S
SS1 : Body-304SS / Cover-304SS
ZZZ : Other

DRAIN END

D : Dust-Proof Cap Inserted
P : With Plug
O : Other

OPTION

S : Scale Plate
O : Other
N : None

L200

AB

B

B

S

S

XXXX

SS1

D

S